


Customer approval :

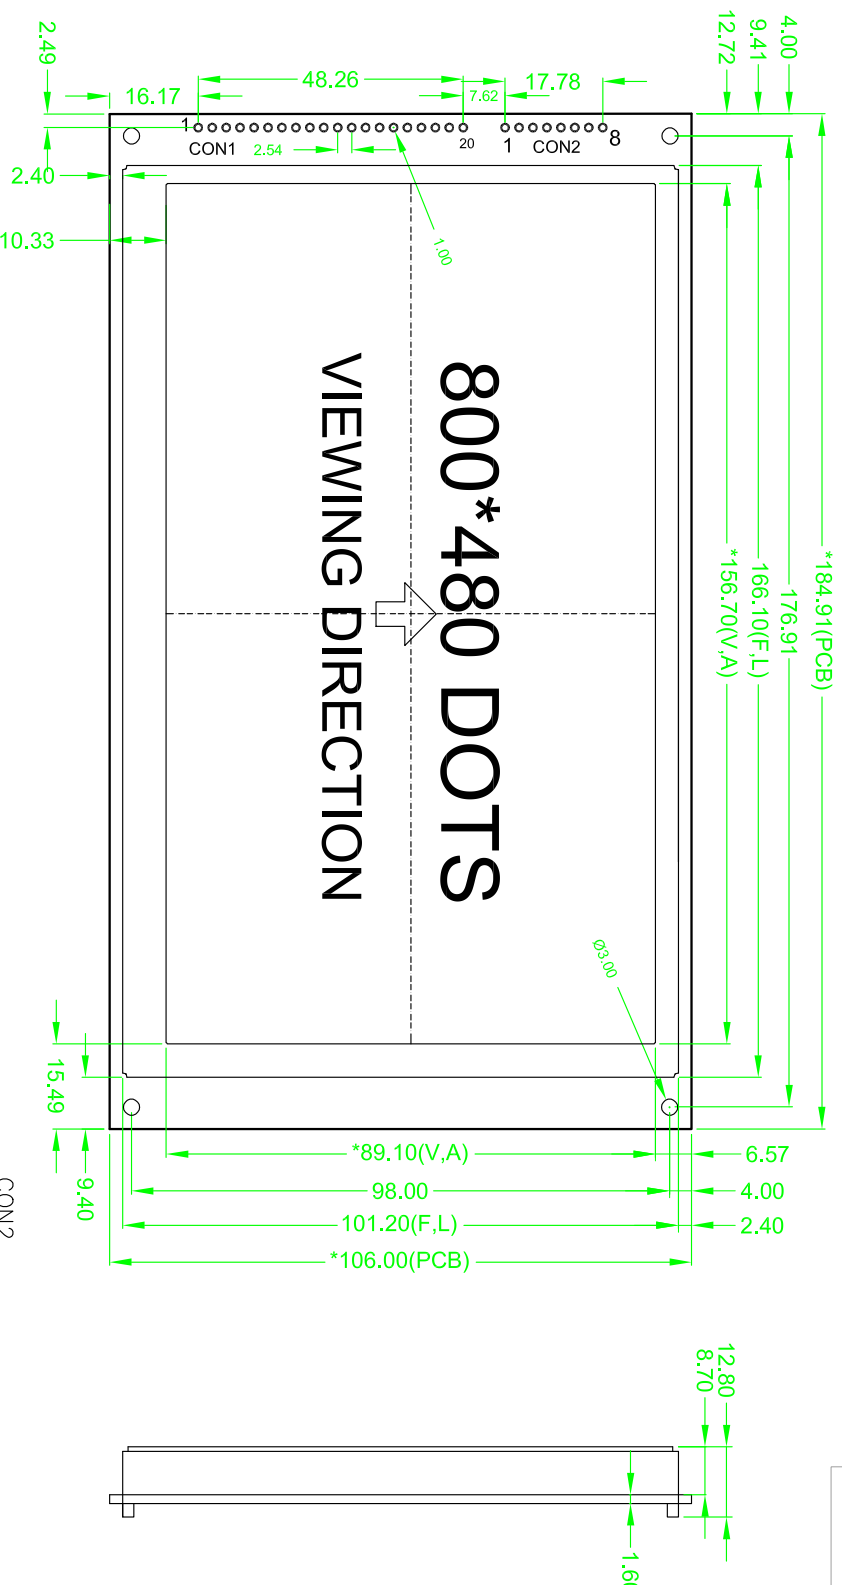

CON1		CON2	
PIN	CONNECTION	PIN	CONNECTION
1	GND	1	DB8
2	VDD	2	DB9
3	INT	3	DB10
4	WR/S0/RD/SPO	4	DB11
5	CS/SCL	5	DB12
6	A0/S5S	6	DB13
7	RST	7	DB14
8	DB0	8	DB15
9	DB1		
10	DB2		
11	DB3		
12	DB4		
13	DB5		
14	DB6		
15	DB7		
16	RXD		
17	TXD		
18	BLA		
19	BLK		
20			

PIN	CONNECTION	PIN	CONNECTION
1	GND	13	PIN
2	VDD	14	CONNECTION
3	INT	15	DB4
4	WR/S0/RD/SPO	16	DB5
5	CS/SCL	17	DB6
6	A0/S5S	18	DB7
7	RST	19	RXD
8	DB0	20	TXD
9	DB1		BLA
10	DB2		BLK
11	DB3		
12	DB4		

Specification:

- 1). Driving:VDD:5.0V IDD:300mA
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode: TFT 800\*480 56K Colour
- 4). Operating temp.: -20°C~+70°C
- 4). Storage temp.: -30°C~+80°C
- 5). Control IC: RA8875L3N
- 6). BACKLIGHT :VBL:5V 350cd/m<sup>2</sup>
- 7). All the raw materials are RoHS compliant
- 8). Interface:8/16BIT 8080/6800;SPI;I2C;UART

REV	REVISION RECORD	DATE	深圳市三元晶科技有限公司 Shenzhen TCCLCD HI-Tech Co., Ltd.					GENERAL TOL:
A	First issue	6/12	MODEL NO.	SYC800480B070V11-5C34ALP0R8-B5NC	GENERAL TOL:	± 0.3		
B	Second issue	8/20	模组型		未注公			
C			APPROVED BY	Francis	DRAWING BY	Luoxian	UNIT: mm	
D			审核	2013/08/20	检查	2013/08/20	单	
			日期	2013/08/20	投影	三角法		