

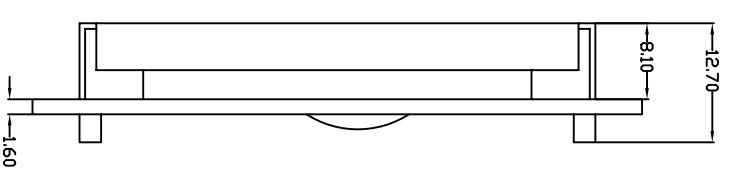


Customer approval :

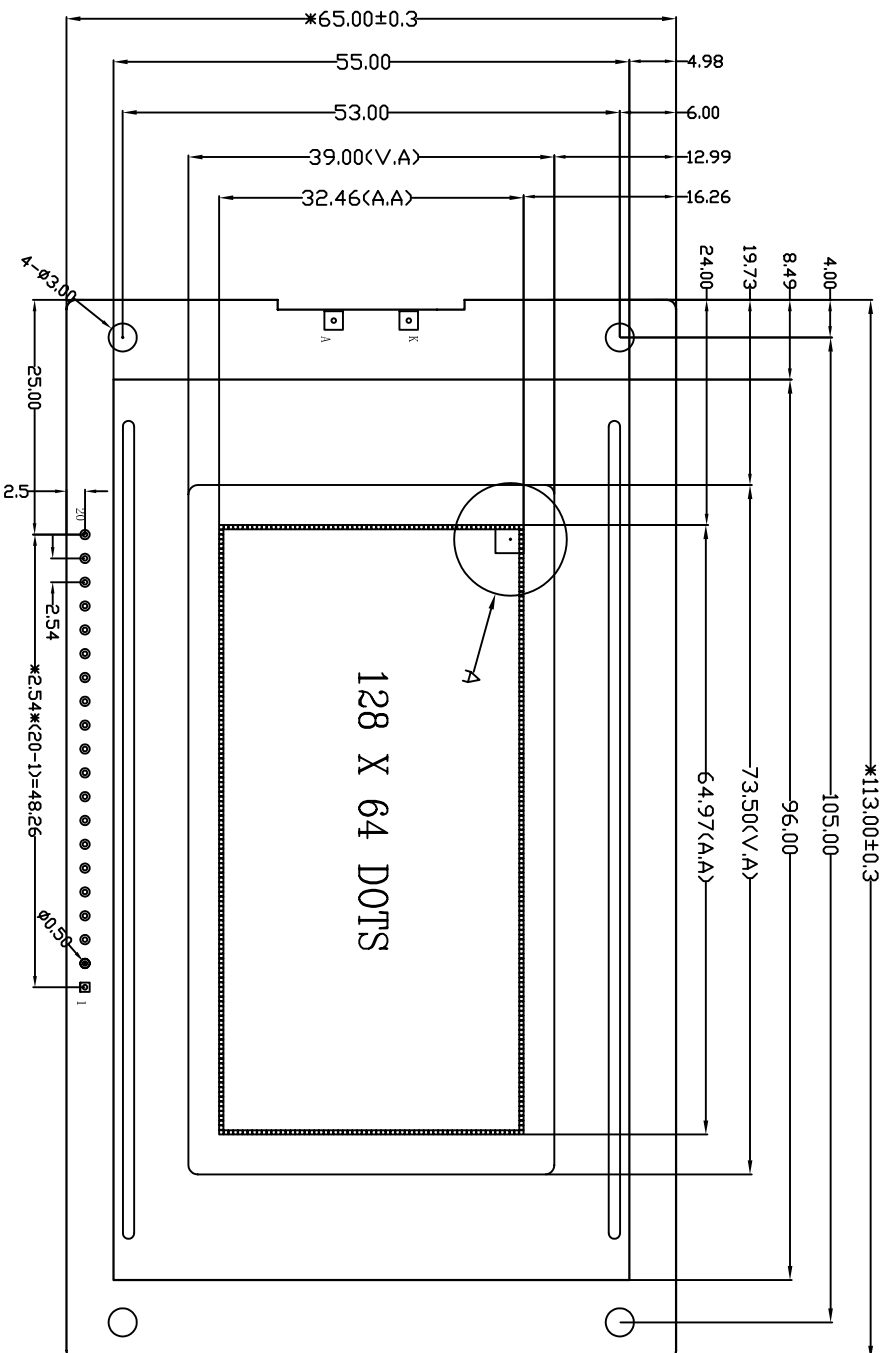

Specification:

- 1). Driving: Duty:1/64, Bias:1/9, VLCD:-9.0V, VDD:5V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN,Y-G/REFLECTIVE/POSITIVE
- 4). Operating temp.: -10°C~60°C
Storage temp.: -20°C~70°C
- 5). Controller IC: S6B0107/S6B0108
- 6). Backlight: Bottom ,YG
- 7). Dimensions with mark "*" are important,
with mark "(") are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB4	DB5	DB6	DB7	CS1	CS2	RST	VOUT	BLA	BLK

REV	REVISION RECORD	DATE
A0	First issue	12/20

深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co., Ltd

MODEL NO. SYB12864AV21
模组型号

APPROVED BY CHECKED BY DRAWING BY

GENERAL TOL: ± 0.3
未注公差
PAGE: 1 OF 1
UNIT: mm
PROJECTION 三角法