




Customer approval :

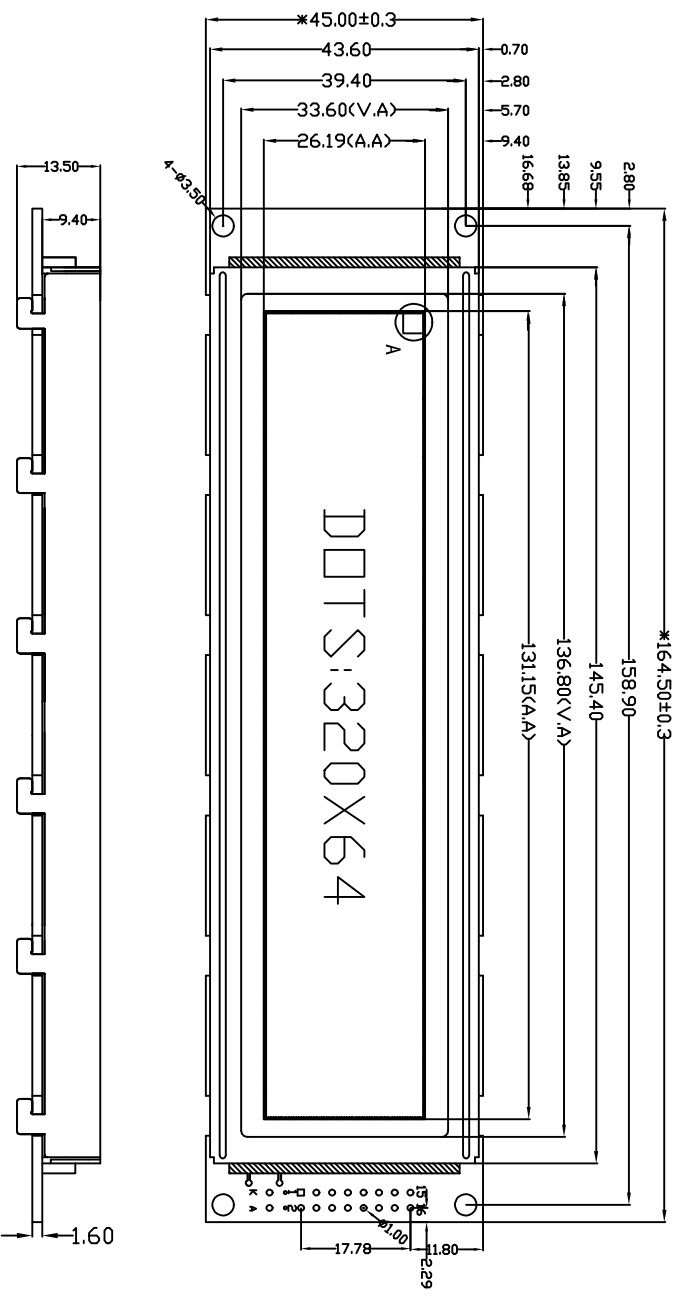

Specification:

- 1). Driving: Dots: 320*64, Duty: 1/64, Bias: 1/9, VDD: 5.0V, VOUT: -14.5V, VO: -12V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode: STN(Y/G), POSITIVE/TRANSPARENT or BIUE
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). Controller IC: T6963 (Or Compatible)
- 6). Backlight: White LED
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant

CONNECTION	RD	WR	RS	VO	VDD	GND	NC	NC	BLA	BLK
PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	RES	CS	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0

REV	REVISION RECORD	DATE	MODEL NO.	GENERAL TOL.	UNIT:
AO	First Issue	01/17	SYB32064BV10	± 0.3	mm
			APPROVED BY	CHECKED BY	DRAWING BY
					PROJECTION

OTCC
深圳市三元晶科技有限公司
Shenzhen TTCCLCD Hi-Tech Co., Ltd

