


Customer approval :

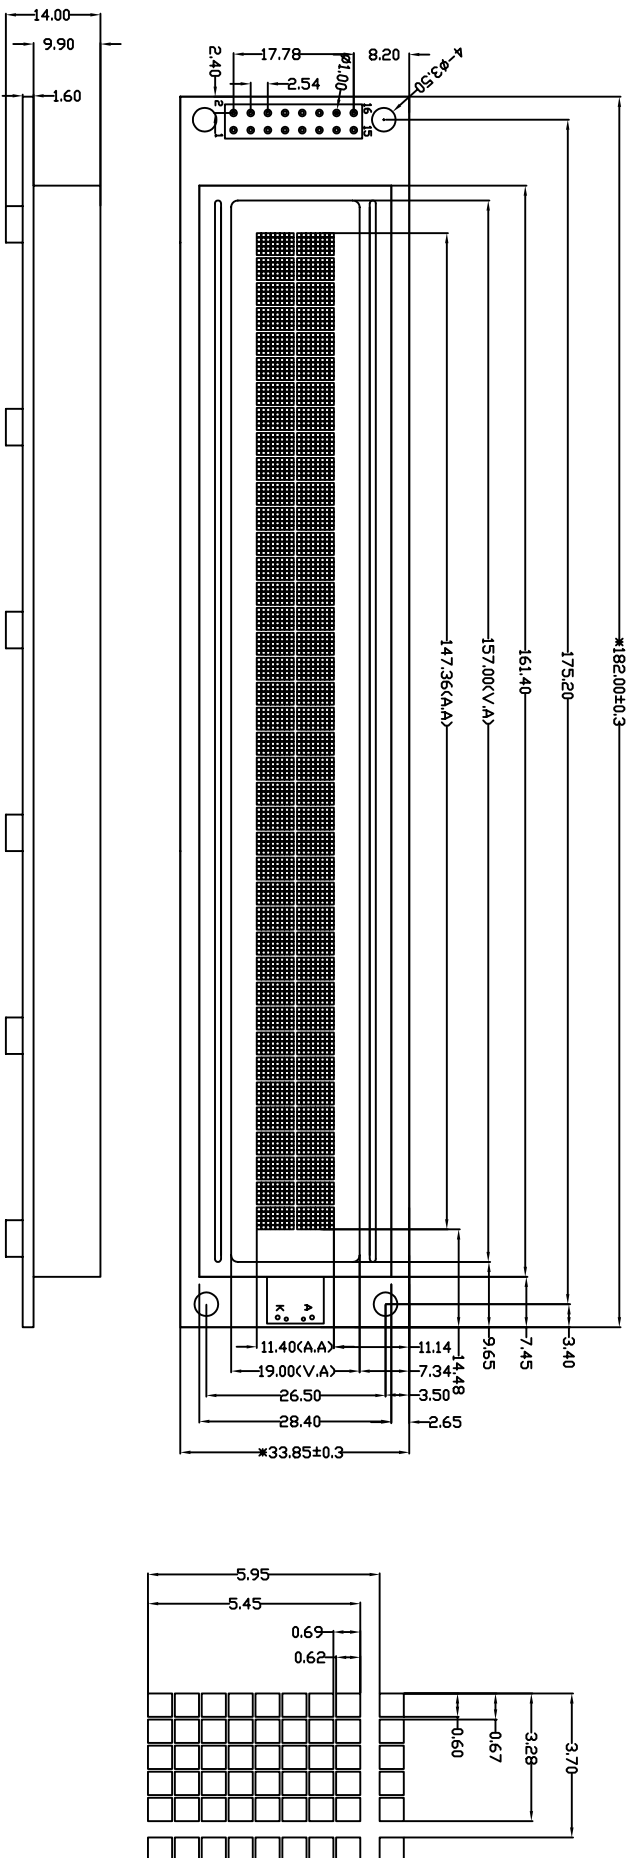

SPECIFICATION:

- 1). Driving: DUTY:1/16, BIAS:1/5, VLCD:8.5V, VDD:5V
- 2). Viewing angle: 6 0'CLOCK
- 3). Display mode: STN(Y/G), POSITIVE
- 4). Operating temp: 0iãC~+50iãC
- 5). Storage temp: -10iãC~+60iãC
- 6). Controller IC: SPLC780D1 (or compatible)
- 7). Dimensions with mark "*" are important, with mark "()" are referenced

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
CONNECTION	GND	VDD	VO	RS	RW	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	BLA	BLK

REV	REVISION RECORD	DATE	MODEL NO.	GENERAL TOL:
A			模组型号	± 0.3
B			SYB4002AV12	
C			APPROVED BY 审核	
D			CHECKED BY 检查	
			DRAWING BY 绘图	
			2012/11/24	
			LoIn	
			PAGE: 1 OF 1	
			PROJECTION 三角法	
			UNIT: mm	

TCC 深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co., Ltd.

