



Customer approval :

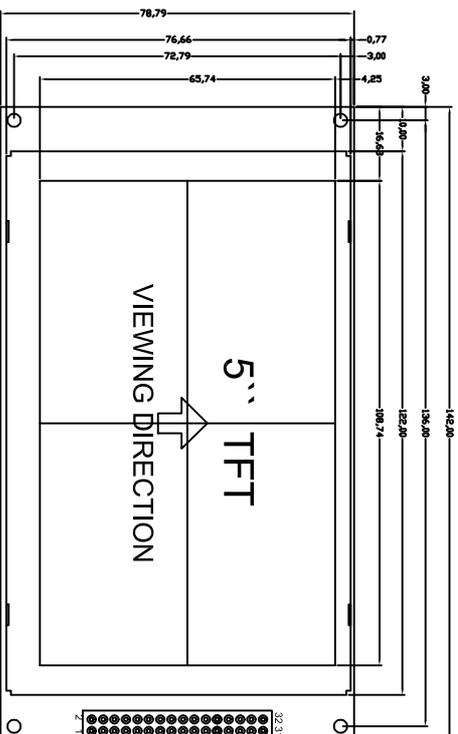

Specification:

- 1). Driving: VDD:5V or 3.3V IDD:300mA
- 2). Viewing direction: 6 o'clock
- 3). Display mode: TFT 65K
- 4). Interface: 8bit/16bit 8080/6800/SPI/I2C;
- 5). Operating temp.: -20°C~+70°C
- 6). Storage temp.: -30°C~+80°C
- 7). Control IC: RA8875
- 8). Backlight : White IBL:400mA 350cd/m²
- 9). All the raw materials are RoHS compliant
- 10). Dimensions with mark "*" are important, with mark "(")" are referenced

Pin	Function	Signal
1	VSS	VSS
2	VDD	VDD
3	NC	NC
4	/MR	NC
5	/RD	NC
6	/CS	NC
7	RS	NC
8	/RST	NC
9	DB0	NC
10	DB1	NC
11	DB2	NC
12	DB3	NC
13	DB4	NC
14	DB5	NC
15	DB6	NC
16	DB7	NC
17	DB8	NC
18	DB9	NC
19	DB10	NC
20	DB11	NC
21	DB12	NC
22	DB13	NC
23	DB14	NC
24	DB15	NC
25	INT	INT
26	Wait	Wait
27	NC	SCL
28	NC	SCS
29	NC	SDO
30	NC	SDI
31	NC	NC
32	NC	NC

REV	REVISION RECORD	DATE	MODEL NO.	CHECKED BY	DRAWING BY	PAGE:	UNIT:
A	First issue	8/11		审核	绘图	1 OF 1	mm
B							
C							
D							



深圳市三元晶科技有限公司
ShenZhen TCC LCD HI-Tech Co., Ltd.

SYC800480D050V10

GENERAL TOL: ±0.3

APPROVED BY
Liu

CHECKED BY
Francis

DRAWING BY
Luoxian

PROJECTION

