

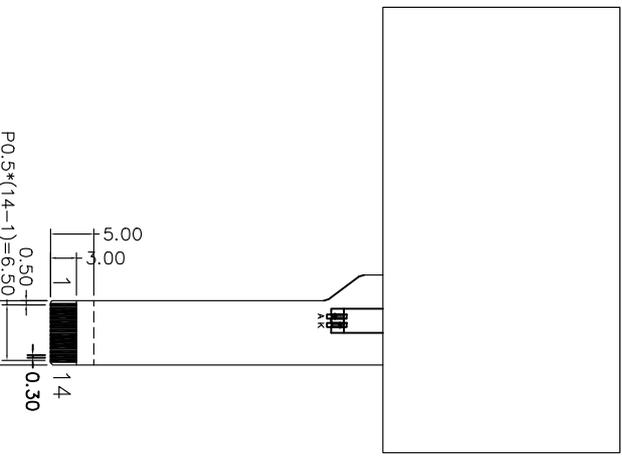
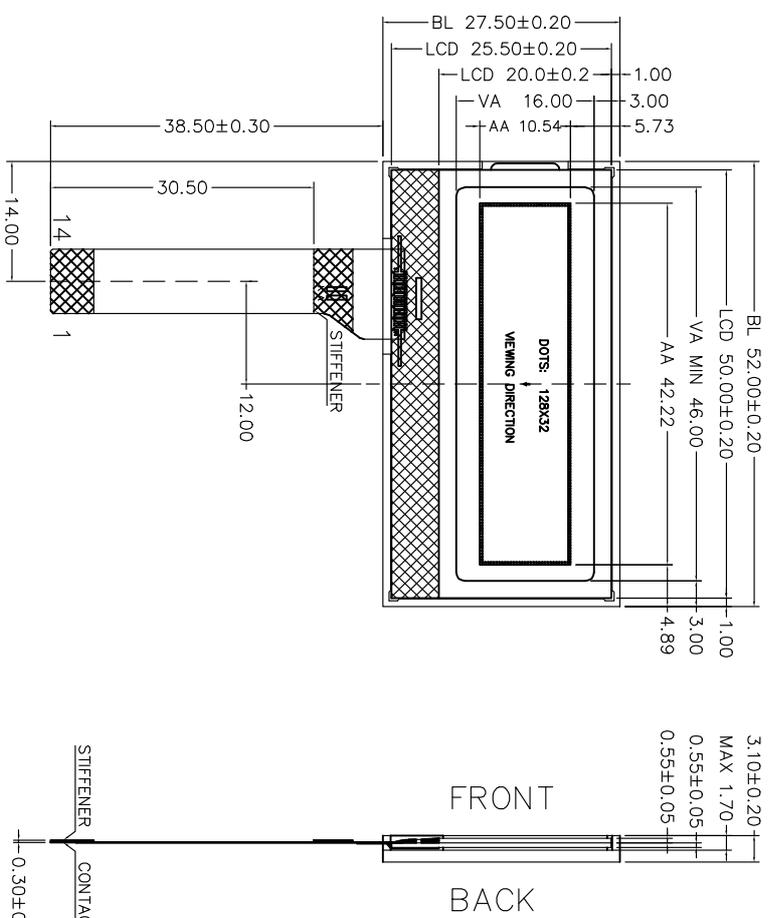



Customer approval :



PIN	SYMBOL
1	A
2	K
3	CS0
4	RST
5	CD
6	SCK
7	SDA
8	VDD
9	VSS
10	VB0+
11	VB0-
12	VB1-
13	VB1+
14	VLCD

- Specifications:
1. Display Mode: FSTN/Transflective/Positive.
 2. Viewing Angle: 12 0'clock.
 3. Drive Method: 1/33 Duty, 1/6 Bias, Vop=9.1V, Vdd=3.3V.
 4. Top: 0°C~+50°C, Tst: -20°C~+70°C.
 5. Connector: COG+FPIC.
 6. Drive IC: UC1705
 7. Backlight: 2PCS WHITE LEDs, If=30mA & Vf=3.1±0.10V
 8. With " * " Mark Dimensions Are Important Dimensions.



REV	REVISION RECORD	DATE	MODEL NO.	CHECKED BY	DRAWING BY	PAGE:	UNIT:
A	FIRST ISSUE	2015/11/03	SYG12832008-3C50F3LN2-BWC	检查	绘图	1 OF 1	mm
B			模组型号	审核			
C			审核				
D			2015/11/03	Francis	Luoxian	3	mm

TCC 深圳市三元晶科技有限公司
Shenzhen TCC LCD Hi-Tech Co., Ltd.

GENERAL TOL: ±0.3

