Customer approval :

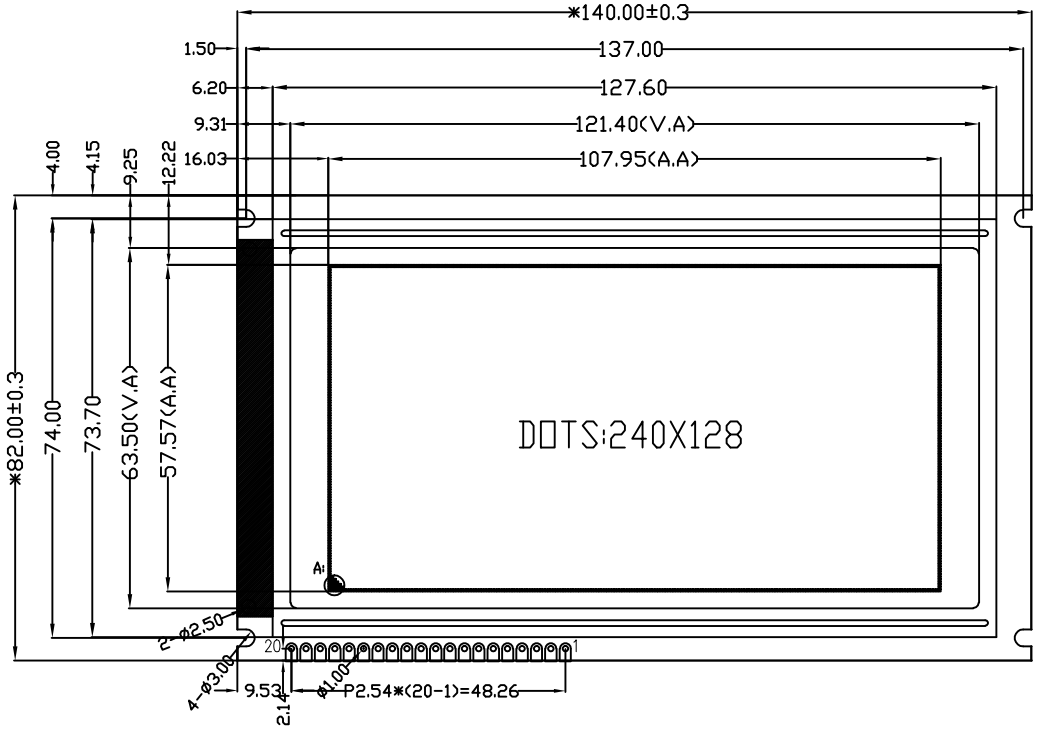

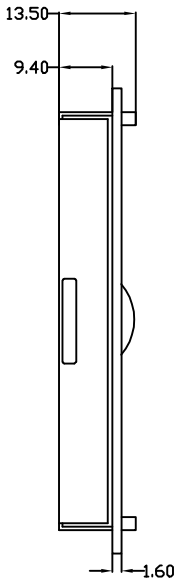





SPECIFICATION:

1). Driving: DotS: 240*128, DUTY: 1/128, BIAS: 1/12, VDD: 5.0V, VOUT: −14.5V, VO: −12.4V
2). Viewing angle: 6 O'CLOCK
3). Display mode: STN/BLUE MODE/TRANSMISSIVE/NEGATIVE
4). Operating temp: 0°C~+50°C
Storage temp: −20°C~+60°C
5). Controller IC: RA8806(Or Compatible)
6). Backlight: White
7). Dimensions with mark "*" are important, with mark "( )" are referenced
8). All the raw materials are RoHS complicant

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
CONNECTION	GND	VDD	VO	CD	RD	WR	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	CS	RES	VOUT	BUSY	IN3	BLA

REVISION RECORD	REV
First issue	A0

深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co., Ltd.

DRAWING NO.	SYM240128IZKV10		GENERAL TOL:	± 0.3
APPROVED BY	CHECKED BY	DRAWING BY	UNIT: mm	PAGE
		LAN 2012/11/05		1/1