



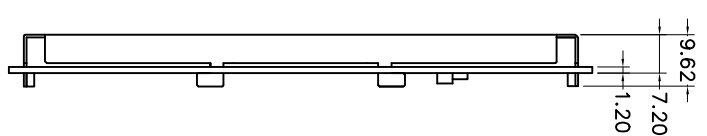


Customer approval :

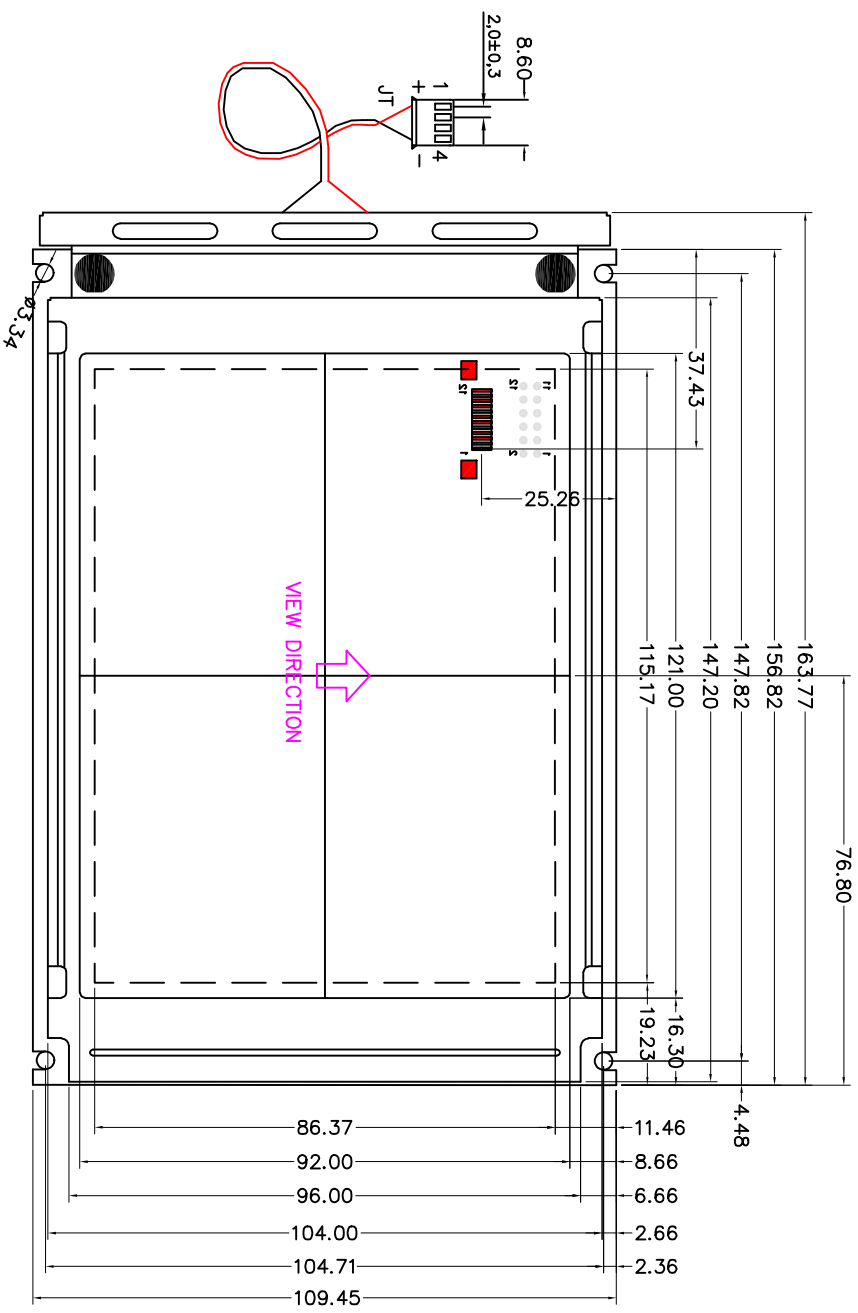

Specification:

- 1). Driving: Duty:1/240, Bias:1/19, VEE:-16.5V, VO:-17.2V, VDD:5.0V.
- 2). Viewing direction: 6 o'clock
- 3). Display mode: FSTN/Negative/Transmissive
- 4). Operating temp: -20°C~+70°C
- 5). Storage temp: -30°C~+80°C
- 6). Control IC:NO
- 7). Backlight: EDGE White LED 5V 160MA
- 8). dimensions with mark "*" are important with mark "(" are referenced
- 9). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10	11	12
CONNECTION	V0	VEE	D0	D1	D2	D3	DISP	VSS	VDD	CP	LP	FLM

REV	REVISION RECORD	DATE	TCCLCD HI - Tech Co., Ltd.			GENERAL TOL:					
A	FIRST ISSUE	2017/09/01	深圳市三元鼎科技有限公司 ShenZhen TCCLCD HI - Tech Co., Ltd.			± 0.3					
B	LED BL	2018/03/01									
C											
D											
MODEL NO. 模组型号		APPROVED BY 审核		CHECKED BY 检查		DRAWING BY 绘图		PAGE: 未注公差		UNIT: 单位:mm	
Liu		Francis		Luoxian		PROJECTION 三角法		PAGE: 1 OF 1			
2018/03/01		2018/03/01		2018/03/01							